


INTRODUCTION OF THE 102mm (4") PRO-FLO X™ ORIGINAL™ SERIES PUMP

Wilden is proud to announce the addition of the Pro-Flo X™ air distribution system (ADS) to the 102mm (4") line of pumps. The revolutionary Pro-Flo X™ ADS can now be used in the most demanding applications requiring large solids passage and superior flow. The patent pending Pro-Flo X™ ADS is retrofit-able into the existing T20 or PV20 Original™ Series wetted path. This model is ideally suited to mining, construction site dewatering, and sludge applications.

Features, Benefits and Details:

- Sizes available: 102mm (4") ANSI flange
- Maximum solids passage: 35mm (1-3/8")
- Efficiency Management System (EMS™)
- Lube-free operation
- Single-point-exhaust option
- Ultra-Flex™ elastomer option for long life, maximum solids passage and maximum MTBR
- Maximum air inlet temperature 82°C (180 °F)
- Maximum operating pressure 8.6 bar (125 psig)

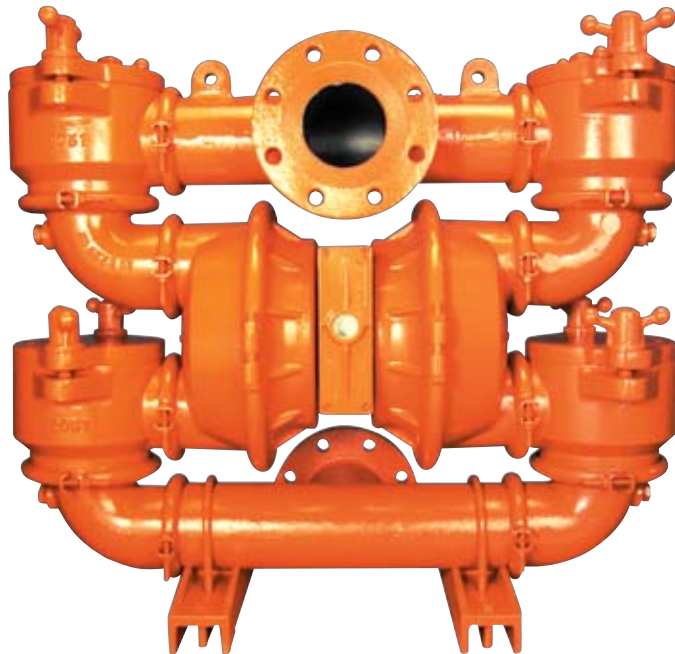

airpumping.co.uk

est. 1979

Unit 16, Upminster Trading Park, Warley St, Upminster, Essex, RM14 3PJ, ENGLAND

22069 Van Buren Street, Grand Terrace, CA 92313
Tel 909.422.1730 • Fax 909.783.3440

www.wildenpump.com

WILDEN
A DOVER COMPANY